

1. General Description


MF5700 series mass flow meters feature cost effective ultra low power operating on 4 AA batteries. The portable design has excellent exchangeable mechanical adaptors, easy data accessible and user programmable capabilities. The internal data storage can also help for purpose flow applications



2. Features and Applications

- Ultra low power by batteries or optional external AC adaptor
- Potable design with rotatable meter head and easy exchangeable mechanical adaptors
- Customizable flow range with over 30:1 turn-down
- Rs485 Modbus protocol ready for networking
- User programmable range alarm for safety and other monitoring/control functionality
- Internal data storage for additional data safety
- Hygienic and oxygen safe copper body for various fluids

3. Mechanical Dimensions

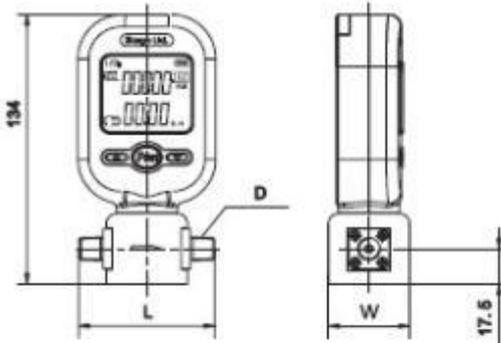

	L	W	D
MF5706	67	40	NPT 1/4
MF5712	98	50	NPT 1/2




4. Specifications

Parameter	MF5706	MF5712	Unit
Flow Range	0 ~ 10 , 25	0 ~ 200	SLPM
Turn-down ratio	30:1		
Accuracy	± (2.0+0.5FS)		%
Repeatability	0.5		%
Response Time	≤2		sec
Power Supply	4 AA batteries (LR6) / 5 ~ 10 Vdc (with 220 Vac adaptor)		
Output	RS 485 (Optional)		
Display	LCD		
Display Units	Instant flow rate: SLPM; Flow accumulation: NCM		
Display Resolution	Instant flow rate 0.01	0.1	SLPM
Resolution	Flow accumulation 0.001		NCM
Continuous Working time	> 60 days (with batteries)		
Max. Pressure	≤0.8		MPa
Working Temperature	-10 ~ +55		°C
Storage Temperature	-20 ~ +65		°C
Humidity	< 95%RH (No icing or condensation)		
Keyboard	3 keys		
User Interface	miniUSB		
Calibration*	Air@ 20 C, 101.325 kPa		
DN	6	12	mm
Mechanical Connection	NPT 1/4	NPT 1/2	
Weight	350		g

* For other gases calibration, please contact Siargo.

5.Product Selection

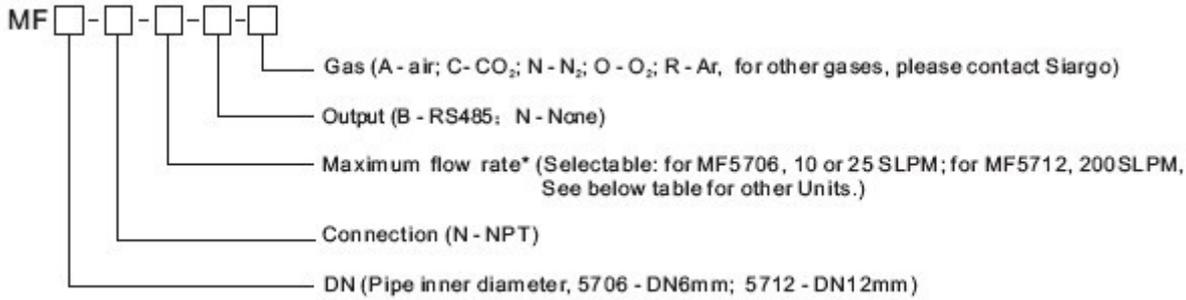

* There is flow rate number only for unit SLPM. If other unit is selected, there must be flow rate number with unit together.
 For CO₂, selectable: 10 or 20 SLPM (without 25 SLPM) for MF5706; 150 SLPM (without 200 SLPM) for MF5712.

Typical flow range:

Model	DN	Connection	Flow Range		
			SLPM	SCFM	NCMH
MF5706	6mm	1/4"	10	0.35	0.6
			25 (20)	0.88 (0.7)	1.5 (1.2)
MF5712	12mm	1/2"	200 (150)	7 (5)	12 (9)



Higiene Ocupacional y Medio Ambiente

www.siafa.com.ar
ventas@siafa.com.ar
 011 4684 2232